


Nondesiccant Breathers - DoublePlay™ and TriplePlay™

nondesiccant filters



- Creates an impenetrable barrier against water droplets
- Pleated element provides a large surface area and is 99.5% efficient in blocking particles 1µ and larger
- Coalesces oil mist, preventing contamination of working environment (TriplePlay only).
- Visual vacuum indicator option actuates before maximum restriction is reached
- Rugged ABS plastic housing
- Easy installation requires hand tighten only.

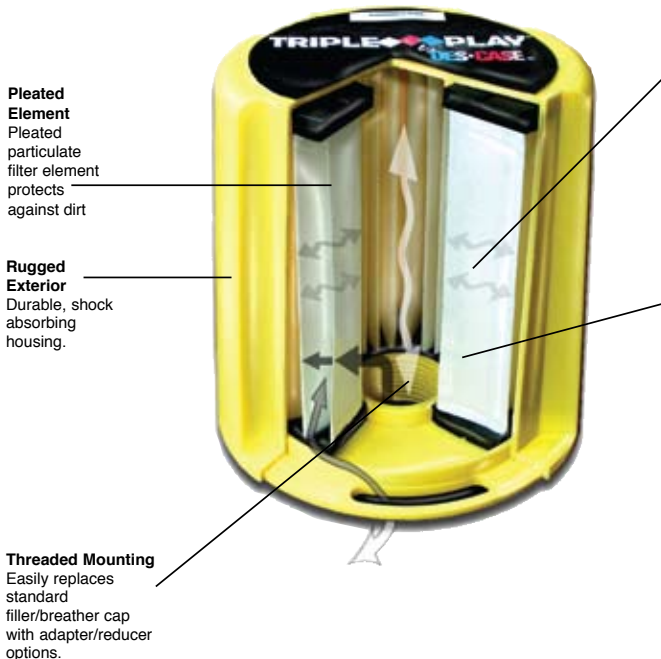

DOUBLE  **PLAY™**
TRIPLE  **PLAY™**

Model Number	DC-SB-25	DC-SB-35
Unit Height	5" / 12.7 cm	5" / 12.7 cm
Unit Diameter	5" / 12.7 cm	5" / 12.7 cm
Filtration Area	180 in. ² / 1161 cm ²	180 in. ² / 1161 cm ²
Amount of Silica gel (lbs./kg)	n/a	n/a
Adsorption Capacity (fl.oz/ L)	n/a	n/a
Max. Flow Rate (cfm)	40 @ 1 PSID	40 @ 1 PSID
Filtration (µ absolute)	1	1
Op. Temp. Range (°F/°C)	-20/-28.9 to 200/93.3	-20/-28.9 to 200/93.3
Hydrophilic Agent	n/a	n/a
Filter Media	Polyester	Oleophobic Polyester
Connection Size (NPT)	1"	1"